

温州市维凯机械有限公司

WENZHOU WEIKAI MACHINERY CO., LTD.

V K M

# 精于分切 · 稳于品质

二十八年专注 · 横切 / 分切 / 复卷成套设备

Three Decades Focused on Slitting, Rewinding & Sheeting Solutions

横切机

Roll-to-Sheet Cutting Machine

分割机

Slitting Machine

复卷机

Rewinding Machine

# 关于维凯

ABOUT WEIKAI · SINCE 1998

温州市维凯机械有限公司



维凯机械创立于 **1998 年**，前身龙港维凯机械厂，2009 年注册温州市维凯机械有限公司，2023 年迁入龙港机械智造园。二十八年专注**横切、分切、复卷**成套设备的研发与制造，产品覆盖不干胶标签、纸张、PVC、EVA 等行业，致力于为全球客户提供高效稳定的卷材加工方案。

*Since 1998, Weikai has grown from a local workshop into a modern manufacturer based in Longgang Intelligent Equipment Park. For nearly three decades, we have specialized in sheeting, slitting and rewinding systems for roll materials including self-adhesive labels, paper, PVC and EVA, delivering reliable, high-performance converting solutions worldwide.*

**1998**

创立年份  
FOUNDED

**28**

年行业  
深耕  
YEARS

**3**

大产品  
系列  
SERIES

**10+**

主销机型  
MODELS

## 核心能力 · CORE CAPABILITIES

01

### 研发设计

R&D

自主设计整机结构与电气控制，参数可按客户工艺定制

02

### 精密制造

Manufacturing

从机架加工到外购件选型，全程执行精密装配工艺与尺寸公差控制

03

### 品质保障

Quality

整机装配完成后逐台开机运行测试，性能符合 JB/T 行业标准

04

### 售后服务

Service

整机一年质保，48 小时内响应客户技术需求

## 发展历程 · MILESTONES

**1998**

创立龙港维凯机械厂，切入横切机制造领域

*Founded Longgang Weikai Plant*

**2009**

注册温州市维凯机械有限公司  
*Registered as Wenzhou Weikai Machinery Co., Ltd.*

**2023**

迁入龙港机械智造园，开启智能化制造新篇

*Relocated to Longgang Machinery Intelligent Equipment Park*

# LC 型横切机

基础款，多种材料适用 Entry-level, suitable for various materials

横切机

SHEETING MACHINE

温州市维凯机械有限公司

## 主图 · 整机外观 / MAIN VIEW



LC 型是面向多种材料加工场景的**基础款**设备，标配双放料位可一次完成双卷材定长裁切，价格实惠，运行稳定。5款宽度型号覆盖 550–1050mm 最大门幅。另外可选紧凑短款型号，或者选配气动上料和张力系统。

*The LC Roll-to-Sheet Cutting Machine is an entry-level sheeting solution for diverse material converters. Standard dual unwind stations enable simultaneous length cutting of two webs, with reliable operation at an economical price. Five web-width models cover 550–1050mm. An optional compact short-frame version is available, as well as upgrades for pneumatic loading and tension control.*

- **双料位放卷，效率倍增**  
Dual-station unwinding doubles throughput
- **断料自动停机，减少空转与浪费**  
Automatic stop on web break minimizes waste and downtime
- **标配静电消除器，带刀口除胶装置**  
Standard static eliminator with blade-cleaning device

## TECHNICAL SPECIFICATIONS

|                          |                                  |
|--------------------------|----------------------------------|
| 可选型号<br>Available Models | LC-600 / 800 / 900 / 1000 / 1100 |
| 放卷直径<br>Unwind Diameter  | 500 mm                           |
| 最小误差<br>Min. Tolerance   | ±0.2 mm                          |
| 最高速度<br>Max. Speed       | 70 m/min · 200 cuts/min          |

## 适用材料与应用 APPLICATIONS

适用于纸张、不干胶标签、PVC、EVA 等卷材的定长裁切，广泛用于印刷、包装、电子等行业。

*Ideal for length cutting of paper, self-adhesive label stock, PVC and EVA webs — widely used in printing, packaging and electronics converting.*

## 细节图位置 / DETAIL SHOTS



标准款后视结构  
STANDARD · REAR VIEW



短款机型示意  
SHORT MODEL · SCHEMATIC



选配 HX 款 单卷气动上料  
OPTIONAL HX · PNEUMATIC LOADING

# HX 型横切机

横切机

伺服送料、气动上料带张力控制 Servo feeding, pneumatic unwind with tension control

SHEETING MACHINE

温州市维凯机械有限公司

主图 · 整机外观 / MAIN VIEW



HX-800 ~ HX-1600

HX 型是**升级款**横切设备，搭载伺服电机送料系统，最高速度 90 米/分，标配气动上料与磁粉张力控制。另有多种选配：纠偏系统、双卷放料套件、圆刀分割系统、传送带收料架、多种大直径放料架。

The HX Roll-to-Sheet Cutting Machine is the upgraded sheeting solution, featuring a servo-motor feeding system with a top speed of 90 m/min. Standard pneumatic loading and magnetic tension control are paired with versatile options including web guiding, dual-roll unwinding, circular-knife slitting, conveyor-belt delivery rack, and multiple large-diameter unwinding stands.

## ● 伺服驱动送料，裁切效率显著提升

Servo-driven feeding for higher throughput

## ● 气动上料配磁粉张力，稳产更省力

Pneumatic loading with magnetic tension control

## ● 多种选配，满足多样化需求

Versatile options for diverse production needs

## TECHNICAL SPECIFICATIONS

可选型号 HX-800 / 900 / 1000 / 1100 / 1200 /  
Available Models 1400 / 1600

放卷直径 900mm 或选配 1.2 米大放料架  
Unwind Diameter

最小误差 ±0.2 mm  
Min. Tolerance

最高速度 90 m/min · 200 cuts/min  
Max. Speed

## 适用材料与应用 APPLICATIONS


适用于纸张、不干胶标签、PVC、EVA 等卷材的宽幅高速定长裁切，广泛用于印刷厂、包装厂等规模化产线。

Ideal for high-speed, wide-format length cutting of paper, self-adhesive label stock, PVC and EVA webs — widely used in printing and packaging production lines.

## 细节图位置 / DETAIL SHOTS



标准款后视结构  
STANDARD · REAR VIEW

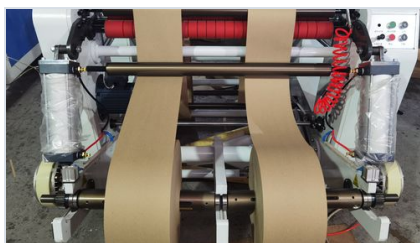

选配 双卷放料套件  
OPTIONAL · DUAL-ROLL UNWINDING



选配 传送带收料架  
OPTIONAL · CONVEYOR DELIVERY

# CLA 型分割机

分割机

气胀轴收卷，气动上料带纠偏 Air-shaft winding, pneumatic loading with web guiding

SLITTING MACHINE

温州市维凯机械有限公司

## 主图 · 整机外观 / MAIN VIEW



CLA 型分割机，收放卷配气胀轴、圆刀分割、风机排废、超声波纠偏。气动上料降低换卷劳动强度。另有多种选配，包括"下收卷气动卸料"方便复卷卸料操作，以及大直径可用的液压放料架。

*The CLA Air Shaft Slitting Machine features air-shaft unwinding and rewinding, circular-knife slitting, blower waste extraction, and ultrasonic web guiding. Pneumatic loading reduces roll-change labor. Optional upgrades include bottom-rewind pneumatic unloading for easier rewinding, plus large-diameter hydraulic unwinding stands.*

- 紧凑结构，节省车间空间  
Compact structure saves floor space
- 气动上料，换卷更高效  
Pneumatic loading speeds up roll changes
- 操作简便，新手友好  
Easy to operate, beginner-friendly

## TECHNICAL SPECIFICATIONS

|                          |                       |
|--------------------------|-----------------------|
| 可选型号<br>Available Models | CLA-1300 / 1600       |
| 放卷宽度<br>Unwind Web Width | 1300 / 1600 mm        |
| 收卷直径<br>Rewind Diameter  | 600mm / 800mm 可定制     |
| 放卷直径<br>Unwind Diameter  | 900mm · 选配 1300 直径放料架 |

## 适用材料与应用 APPLICATIONS

适用于纸张、不干胶标签、PVC、EVA 等卷材的分切与复卷，特别适合中小批量、多规格的生产场景。

*Ideal for slitting and rewinding paper, self-adhesive label stock, PVC and EVA webs — especially suited to small-batch, multi-spec production.*

## 细节图位置 / DETAIL SHOTS



标准款后视结构  
STANDARD · REAR VIEW



选配 下收卷气动卸料  
OPTIONAL · BOTTOM REWIND



选配 液压有轴放料架  
OPTIONAL · HYDRAULIC SHAFT

# CLT 型分割机

分割机

CLA 升级款，速度更快更稳 CLA upgrade, faster speed and greater stability

SLITTING MACHINE  
温州市维凯机械有限公司

## 主图 · 整机外观 / MAIN VIEW



CLT 是 CLA 型的**全面升级款**。同样是双气胀轴同步收卷，配更大的主电机，运行速度更快；加厚的墙板，高速也能稳定；精度更高的分割刀和纠偏系统来保证更好的分割效果。另有多种选配，包括常用的几种放料架。

*The CLT is the comprehensive upgrade of the CLA model. It retains dual air-shaft synchronous rewinding, paired with a more powerful main motor for faster running speed. Thicker wall panels ensure stability at high speed. Higher-precision slitting knives and an upgraded web guiding system deliver cleaner cuts. Multiple unwinding stands are available as options.*

- **升级款，速度 300 米/分钟**  
Upgraded model, runs at 300 m/min
- **分割精度高，收卷端面平整**  
High slitting precision, clean rewinds
- **磁粉张力锥度控制**  
Magnetic-particle taper tension control

## TECHNICAL SPECIFICATIONS

|                  |                   |
|------------------|-------------------|
| 可选型号             | CLT-1300 / 1600   |
| Available Models |                   |
| 放卷宽度             | 1300 / 1600 mm    |
| Unwind Web Width |                   |
| 收卷直径             | 600mm / 800mm 可定制 |
| Rewind Diameter  |                   |
| 放卷直径             | 900mm / 1300mm 可选 |
| Unwind Diameter  |                   |

## 适用材料与应用 APPLICATIONS

适用于纸张、不干胶标签、PVC、EVA 等卷材的高速分切与复卷，适合多规格连续生产。

*Ideal for high-speed slitting & rewinding of paper, self-adhesive label stock, PVC and EVA webs — suited to multi-spec continuous production.*

## 细节图位置 / DETAIL SHOTS



标准款后视结构  
STANDARD · REAR VIEW



升级款 气动放料架  
UPGRADED · PNEUMATIC UNWIND



选配 液压有轴上料  
OPTIONAL · HYDRAULIC SHAFT

# CLH 型滑差轴分割机

入门款滑差轴机型 Entry-level slip-shaft model

分割机

SLITTING MACHINE

温州市维凯机械有限公司

## 主图 · 整机外观 / MAIN VIEW



CLH 型是入门款滑差轴收卷分割设备。配双滑差轴差速收卷、磁粉制动、张力锥度自动控制、超声波纠偏，中间牵引配合圆刀分割与风机排废，速度可达 200 米/分。多种选配：收卷压辊、保护膜贴合、大直径放料架。

The CLH Slip Shaft Slitting Machine is the entry-level slip-shaft slitting solution. It features dual slip-shaft differential rewinding, magnetic-particle braking, automated taper tension control, and ultrasonic web guiding. Center traction with circular-knife slitting and blower waste extraction delivers up to 200 m/min. Optional upgrades include a rewind nip roller, protective-film lamination, and large-diameter unwinding stands.

- 双滑差轴差速收卷，端面齐整  
Dual slip-shaft differential rewinding, clean edges
- 收卷及放卷张力单独锥度控制  
Independent taper tension for unwind & rewind
- 放卷气动上料带超声波纠偏  
Pneumatic unwinding with ultrasonic web guiding

## TECHNICAL SPECIFICATIONS

|                          |                   |
|--------------------------|-------------------|
| 可选型号<br>Available Models | CLH-1300 / 1600   |
| 放卷宽度<br>Unwind Web Width | 1300 / 1600 mm    |
| 收卷直径<br>Rewind Diameter  | 600 mm            |
| 放卷直径<br>Unwind Diameter  | 900mm / 1300mm 可选 |

## 适用材料与应用 APPLICATIONS

适用于纸张、不干胶标签、PVC、EVA 等卷材的分切与复卷，是滑差轴机型的入门之选。

Ideal for slitting & rewinding paper, self-adhesive label stock, PVC and EVA webs — the entry choice for slip-shaft applications.

## 细节图位置 / DETAIL SHOTS



标准款后视结构  
STANDARD · REAR VIEW



选配 液压上料架  
OPTIONAL · HYDRAULIC LOADING



辅助卸料架  
AUX. UNLOADING STAND

# CLS 型滑差轴分割机

分割机

CLH 升级款，速度更快，精度更高 CLH upgrade, faster speed and higher precision

SLITTING MACHINE  
温州市维凯机械有限公司

主图 · 整机外观 / MAIN VIEW



CLS 是 **CLH 升级款**，沿用双滑差轴收卷、放卷磁粉制动与收放卷张力锥度控制，**升级电机功率、墙板厚度与分割刀精度**，速度与稳定性同步提升。新增选配：辅助调刀系统、辅助对纸管系统、收卷推料系统。

*The CLS is the upgraded CLH, retaining dual slip-shaft rewinding, an unwind magnetic powder brake and taper tension control, with upgraded motor power, thicker wall panels and higher-precision slitting knives. New options: auxiliary knife adjustment, auxiliary paper-tube assist and rewind push-out.*

- **全面升级，速度 300 米/分钟**  
Full upgrade, 300 m/min
- **沿用 CLH 成熟配置，端面平整张力稳定**  
Proven CLH platform, flush edges & stable tension
- **选配气动接纸、收卷推料，换卷卸料更省人工**  
Optional splicing & rewind push-out save labor

## TECHNICAL SPECIFICATIONS

|                  |                  |
|------------------|------------------|
| 可选型号             | CLS-1300 / 1600  |
| Available Models |                  |
| 放卷宽度             | 1300 / 1600 mm   |
| Unwind Web Width |                  |
| 收卷直径             | 600 mm           |
| Rewind Diameter  |                  |
| 放卷直径             | 900 / 1300 mm 可选 |
| Unwind Diameter  |                  |

## 适用材料与应用 APPLICATIONS

适用于纸张、不干胶标签、PVC、EVA 等卷材的高速分切与复卷，是 CLH 用户的扩展升级之选。

*Ideal for high-speed slitting & rewinding of paper, self-adhesive label stock, PVC and EVA webs — the natural upgrade for existing CLH users.*

## 细节图位置 / DETAIL SHOTS



标准款后视结构  
STANDARD · REAR VIEW



选配 液压有轴上料  
OPTIONAL · HYDRAULIC SHAFT



选配 带接纸平台放料架  
OPTIONAL · SPLICING UNWIND

# GLC 型滑差轴分割机

配剥离收卷、贴合功能 Equipped with peel-off winding and lamination

分割机

SLITTING MACHINE

温州市维凯机械有限公司

## 主图 · 整机外观 / MAIN VIEW



GLC 是 CLS 基础上的订制功能机型，增加剥离收卷与贴合放料功能，可在线完成底纸剥离与贴合，实现换底纸等特殊工艺。同样可选辅助调刀系统与辅助对纸管功能。

The GLC is a customized-function model built on the CLS, adding delamination rewinding and lamination unwinding for in-line liner removal and re-lamination — processes such as liner change-over in a single pass. Optionally available with an auxiliary knife-adjustment system and an auxiliary paper-tube assist.

- 顶置剥离贴合功能，一机多用  
Top-mounted delamination & lamination, one machine multiple processes
- 最高速度 300 米/分钟，性能强悍  
Up to 300 m/min, high performance
- 可选辅助调刀和辅助对纸管，提升工作效率  
Optional knife adjustment and paper-tube assist for higher efficiency

## TECHNICAL SPECIFICATIONS

|                          |                  |
|--------------------------|------------------|
| 可选型号<br>Available Models | GLC-1300 / 1600  |
| 放卷宽度<br>Unwind Web Width | 1300 / 1600 mm   |
| 收卷直径<br>Rewind Diameter  | 600 mm           |
| 放卷直径<br>Unwind Diameter  | 900 / 1300 mm 可选 |

## 适用材料与应用 APPLICATIONS

适用于纸张、不干胶标签、PVC、EVA 等卷材的高速分切与复卷、剥离与贴合。

Ideal for high-speed slitting, rewinding, delamination and lamination of paper, self-adhesive label stock, PVC and EVA webs.

## 细节图位置 / DETAIL SHOTS



剥离贴合功能特写  
DELAMINATION & LAMINATION



整机后视结构  
REAR VIEW



客户现场运行实拍  
ON SITE OPERATION

# GLS 型滑差轴分割机

分割机

液压无轴上料，适用大直径卷材 Hydraulic shaftless loading, for large-diameter rolls

SLITTING MACHINE

温州市维凯机械有限公司

主图 · 整机外观 / MAIN VIEW



GLS 型分割机，配双滑差轴收卷，放卷液压无轴上料，最大可用直径达 1.3 米，换卷无需穿轴；运行速度 300 米/分钟，成卷张力均匀、端面平整。选配顶置推料系统，收卷卸料更省人工。

The GLS is equipped with dual slip-shaft rewinding and a hydraulic shaftless unwind with a 1.3 m maximum usable diameter, allowing roll changes without threading the shaft. Running speed is 300 m/min with uniform roll tension and perfectly flush edges. An optional top-mounted push-out system makes rewinding and discharge easier.

- 双滑差轴收卷，成卷张力均匀稳定  
Dual slip-shaft rewinding for uniform tension
- 液压无轴上料，可选承重 1.5—2 吨  
Hydraulic shaftless unwind, 1.5—2 t capacity
- 可选大功率风机，排废更顺畅  
Optional high-power blower for smoother waste removal

## TECHNICAL SPECIFICATIONS

|                  |                 |
|------------------|-----------------|
| 可选型号             | GLS-1300 / 1600 |
| Available Models |                 |
| 放卷宽度             | 1300 / 1600 mm  |
| Unwind Web Width |                 |
| 收卷直径             | 600 mm          |
| Rewind Diameter  |                 |
| 放卷直径             | 1300 mm         |
| Unwind Diameter  |                 |

## 适用材料与应用 APPLICATIONS

适用于纸张、不干胶标签、PVC、EVA 等卷材的高速分切与复卷，适合大卷径、连续批量生产。

Ideal for high-speed slitting & rewinding of paper, self-adhesive label stock, PVC and EVA webs — suited to large-diameter rolls and continuous batch production.

## 细节图位置 / DETAIL SHOTS



整机后视结构  
REAR VIEW



3 / 6 机械式夹头  
3 / 6 MECHANICAL CHUCK



选配 顶置推料系统  
OPTIONAL · TOP PUSH-OUT

# GLM 型龙门式滑差轴分割机

龙门结构，高速高配 Gantry structure, high-speed and high-spec

分割机

SLITTING MACHINE

温州市维凯机械有限公司

主图 · 整机外观 / MAIN VIEW



GLM 是**龙门式**滑差轴分割机。放卷为**液压无轴上料**，搭配**气动接纸平台**；中间牵引配合圆刀分切与风机排废，运行速度可达 400 米/分钟；收卷为**双滑差轴**配张力锥度控制，全程张力稳定、端面平整无褶皱。

The GLM is a portal-type slip-shaft slitting machine. The unwind is a hydraulic shaftless type combined with a pneumatic splicing table; center traction with circular-knife slitting and blower waste extraction runs at up to 400 m/min; dual slip-shaft rewinding with taper tension control delivers stable tension throughout and perfectly flush roll edges.

● 放卷液压无轴上料，搭配气动接纸平台，换卷更省时  
Hydraulic shaftless unwind with pneumatic splicing table

● 全程张力稳定，端面平整无皱  
Stable tension, clean roll edges

● 收卷处自动推料卸卷，大幅节省人力  
Automatic push-off at rewinding saves labor

## TECHNICAL SPECIFICATIONS

可选型号 GLM-1600 / 1800

Available Models

放卷宽度 1600 / 1800 mm

Unwind Web Width

收卷直径 600 / 800 mm 可选

Rewind Diameter

放卷直径 1300 mm


Unwind Diameter

## 适用材料与应用 APPLICATIONS

适用于标签、纸张、不干胶、PVC、EVA 等多种卷材的高速分切与复卷，适合大批量连续生产。

Ideal for high-speed slitting & rewinding of label stock, paper, self-adhesive, PVC and EVA webs — well suited to large-volume continuous production.

## 细节图位置 / DETAIL SHOTS

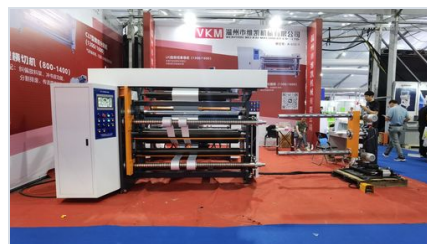

整机全景  
FULL VIEW



侧面龙门跨架结构  
SIDE VIEW · GANTRY FRAME



侧后视图，放料位  
REAR VIEW · UNWIND POSITION

# CLF 型复卷机

收卷直径 900，液压卸料 Rewind Ø900, hydraulic unloading

复卷机

REWINDING MACHINE

温州市维凯机械有限公司

主图 · 整机外观 / MAIN VIEW



CLF-1300 / CLF-1600

CLF 是单轴复卷的紧凑一体式机型，主机集成切边系统与风机排废，放卷标配液压有轴上料架，收卷带液压卸料装置，上下料省时省力，运行速度可达 300 米/分。

The CLF is a compact all-in-one single-shaft rewinding machine with an integrated trimming system and blower waste extraction. The unwind comes standard with a hydraulic shaft-type loading stand, and a hydraulic device assists discharge — loading and unloading are quick and effortless at up to 300 m/min.

- 一体式紧凑机身，节省场地与安装成本  
All-in-one compact design saves floor space
- 可切边也可分割，带风机排废  
Trimming and slitting, with blower extraction
- 标配液压有轴上料，可选液压无轴上料  
Standard hydraulic shaft-type unwind, shaftless optional

## TECHNICAL SPECIFICATIONS

|                          |                 |
|--------------------------|-----------------|
| 可选型号<br>Available Models | CLF-1300 / 1600 |
| 放卷宽度<br>Unwind Web Width | 1300 / 1600 mm  |
| 收卷直径<br>Rewind Diameter  | 900 mm          |
| 放卷直径<br>Unwind Diameter  | 1300 mm         |

## 适用材料与应用 APPLICATIONS

适用于纸张、不干胶标签、PVC、EVA 等卷材的单轴复卷，收卷直径可达 900mm，适合中小批量、快速换单的生产场景。

Ideal for single-shaft rewinding of paper, self-adhesive label stock, PVC and EVA webs, with rewind diameters up to 900 mm — well suited to small-to-medium batches and frequent job changes.

## 细节图位置 / DETAIL SHOTS



后视 · 放料位与电柜  
REAR VIEW · UNWIND & CABINET



收卷部分特写  
REWIND SECTION



分割部分 · 圆刀与切边  
SLITTING SECTION

# VLF 型复卷机

复卷机

REWINDING MACHINE

收放卷直径 1300，液压卸料 Rewind / unwind Ø1300, hydraulic unloading

温州市维凯机械有限公司

## 主图 · 整机外观 / MAIN VIEW



VLF 是**宽幅大卷径**复卷机，单轴收卷配**压辊**，收卷紧实。中间牵引稳速走料，张力均匀。**液压无轴上料配气动接纸平台**，换卷连贯节约时间。运行速度可达 400 米/分钟。另有**液压有轴放料架**可选。

The VLF is a wide-web rewinder for large-diameter rolls. Single-shaft rewinding with a pressure roller delivers tight rolls; mid-web traction keeps feeding steady and tension uniform. A hydraulic shaftless unwind with a pneumatic splicing platform makes roll changes continuous and time-saving. Running speed up to 400 m/min. A hydraulic shaft-type unwind stand is optionally available.

- 单轴收卷配气动压辊，收卷紧实无气泡褶皱  
Single-shaft rewind with pneumatic pressure roller
- 中间牵引稳速走料，张力均匀复卷平整  
Mid-web traction for uniform tension, smooth rolls
- 液压无轴上料配气动接纸，换卷连贯节约时间  
Hydraulic shaftless unwind with pneumatic splicing

## TECHNICAL SPECIFICATIONS

|                          |          |
|--------------------------|----------|
| 可选型号<br>Available Models | VLF-1600 |
| 放卷宽度<br>Unwind Web Width | 1600 mm  |
| 收卷直径<br>Rewind Diameter  | 1300 mm  |
| 放卷直径<br>Unwind Diameter  | 1300 mm  |

## 适用材料与应用 APPLICATIONS

适用于不干胶、纸张、PVC 等材料母卷的复卷，放卷与收卷直径均可达 1300mm。

Suitable for rewinding master rolls of self-adhesive label stock, paper, PVC and similar materials, with unwind and rewind diameters up to 1300 mm.

## 细节图位置 / DETAIL SHOTS



分割部分特写  
SLITTING SECTION



液压无轴上料  
HYDRAULIC SHAFTLESS UNWIND



液压有轴放料示意图  
HYDRAULIC SHAFT-TYPE UNWIND

# LMF 型复卷机

复卷机

VLF 型升级款，龙门结构 VLF upgrade with gantry structure

REWINDING MACHINE  
温州市维凯机械有限公司

主图 · 整机外观 / MAIN VIEW



LMF 是**龙门式复卷机**，**VLF 复卷机的升级款**，重型机架复卷稳定可靠。放卷与收卷直径均可达 **1300mm**，液压有轴收卷带压辊，收卷紧实；圆刀修边配风机排废；放卷液压无轴上料，配气动接纸平台。最高运行速度可达 500 米/分钟。

The LMF is a portal-type rewinding machine, an upgraded version of the VLF, built on a heavy-duty frame for rock-solid stability. Both unwind and rewind diameters reach 1300 mm; hydraulic shafted rewinding with a pressure roller delivers tight rolls; circular-knife edge trimming is paired with blower waste extraction; and a hydraulic shaftless unwind with a pneumatic splicing platform serves the unwind. Maximum running speed up to 500 m/min.

- **龙门款架结构，重型机架稳定可靠**  
Portal frame structure, stable heavy-duty build
- **液压有轴收卷带压辊，收卷紧实**  
Hydraulic shafted rewind with pressure roller
- **最高速度 500 米/分钟**  
Maximum speed 500 m/min

## TECHNICAL SPECIFICATIONS

|                  |                 |
|------------------|-----------------|
| 可选型号             | LMF-1600 / 1800 |
| Available Models |                 |
| 放卷宽度             | 1600 / 1800 mm  |
| Unwind Web Width |                 |
| 收卷直径             | 1300 mm         |
| Rewind Diameter  |                 |
| 放卷直径             | 1300 mm         |
| Unwind Diameter  |                 |

## 适用材料与应用 APPLICATIONS

适用于纸张、不干胶标签、PVC、EVA 等卷材的复卷与修边，放卷与收卷直径均可达 1300mm，适合大卷径、连续批量复卷生产。

Ideal for rewinding and edge trimming of paper, self-adhesive label stock, PVC and EVA webs, with unwind and rewind diameters up to 1300 mm — well suited to large-diameter, continuous batch production.

## 细节图位置 / DETAIL SHOTS



VKM

正侧视图  
FRONT-SIDE VIEW



放料视图  
UNWIND SECTION



侧后视图  
REAR-SIDE VIEW

# LFJ 型复卷机

复卷机

REWINDING MACHINE

厂家必备，自动卸料并竖立 A must-have — auto unloading & upright standing

温州市维凯机械有限公司

## 主图 · 整机外观 / MAIN VIEW



LFJ 型复卷机，收卷配**自动卸料架**，成品打包好之后可直接自动从收卷轴中抽出卸料并**竖立**，方便工人转移到托盘上，减少操作工序；放卷**液压无轴上料**配**气动接纸平台**，换卷快捷省料。

The LFJ rewinding machine is fitted with an automatic unloading stand: once a finished roll is packed it is drawn straight out of the rewind shaft, discharged and stood upright, ready for the operator to transfer onto a pallet — cutting out handling steps. A hydraulic shaftless unwind with a pneumatic splicing platform makes roll changes quick and material-saving.

- **卧式分体结构，安装维护更便捷**  
Horizontal split-frame, easy install & maintenance
- **收卷自动卸料，减少人工搬运**  
Automatic discharge, less manual handling
- **气动接纸换卷，快捷省料降损耗**  
Pneumatic splicing, faster and less waste

## TECHNICAL SPECIFICATIONS

|                  |                 |
|------------------|-----------------|
| 可选型号             | LFJ-1600        |
| Available Models |                 |
| 放卷宽度             | 1600 mm         |
| Unwind Web Width |                 |
| 收卷直径             | 600 / 800 mm 可选 |
| Rewind Diameter  |                 |
| 放卷直径             | 1300 mm         |
| Unwind Diameter  |                 |

## 适用材料与应用 APPLICATIONS

适用于不干胶、纸张、PVC 等卷材的复卷作业，带自动卸料和竖立功能，适合连续批量复卷生产。

Suitable for rewinding self-adhesive label stock, paper and PVC webs, with automatic unloading and upright standing functions — ideal for continuous batch rewinding production.

## 细节图位置 / DETAIL SHOTS



收卷部分特写  
REWIND SECTION



卸料架特写  
UNLOADING STAND



侧后视图  
REAR-SIDE VIEW

# 精于分切 · 稳于品质

期待与您携手合作，共创共赢

We look forward to working with you for shared success.

电 话 0577-64359986 / 64265882

手 机 13958796068 / 13758872658

邮 箱 5653911@qq.com

官 网 [www.wkcorp.cn](http://www.wkcorp.cn)

地 址 温州市龙港市高端机械设备智造园 5 栋 4 层  
4F, Building 5, High-end Machinery & Equipment Smart  
Manufacturing Park, Longgang, Wenzhou, Zhejiang



扫码访问官网  
SCAN FOR WEBSITE



扫码关注公众号  
FOLLOW US ON WECHAT